




PressurePro's 10 Wheel Monitor

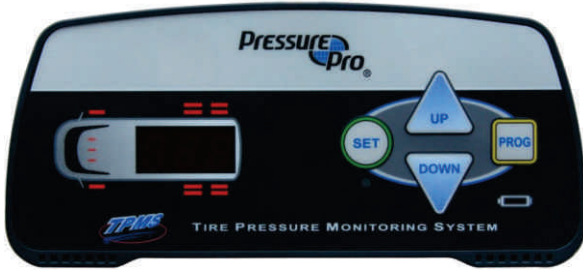

Specifications

Sensor Transmit Range	Approx. 300 feet line-of-sight
Operating Frequency	433.92 MHz FM
Monitor Power Requirements	12VDC; 125 mA in standby, <250mA with LEDs on.
Monitor Dimensions	6.5" W x 3.0" H x 0.5" D
Monitor Weight	4 oz.
Monitor Power Cord Plug Type	USB Mini B – 8 ft. cord
Monitor Tire Positions	1 to 10 wheel positions
Sensor Alarm Trigger Settings	12.5% and 25% below the original tire inflation level; Upper alert variable by user from 10% to 45% (or off) High temperature alert at 194° F
RS232 Capable	Real time serial packet data Data logging

PressurePro's 34 Wheel Monitor



Specifications

Sensor Transmit Range	Approx. 300 feet line-of-sight
Operating Frequency	433.92 MHz FM
Monitor Power Requirements	12VDC; 125 mA in standby, <250mA with LEDs on.
Monitor Dimensions	6.5" W x 3.0" H x 0.5" D
Monitor Weight	4 oz.
Monitor Power Cord Plug Type	Type USB Mini B – 8 ft. cord
Monitor Tire Positions	1 to 34 wheel positions
Sensor Alarm Trigger Settings	12.5% and 25% below the original tire inflation level; Upper alert variable by user from 10% to 45% (or off) High temperature alert at 194° F
RS232 Capable	Real time serial packet data Data logging

PressurePro's 10 Wheel Monitor



Specifications

Sensor Transmit Range	Approx. 300 feet line-of-sight
Operating Frequency	433.92 MHz FM
Monitor Power Requirements	12VDC; 125 mA in standby, <250mA with LEDs on.
Monitor Dimensions	6.5" W x 3.0" H x 0.5" D
Monitor Weight	4 oz.
Monitor Power Cord Plug Type	USB Mini B – 8 ft. cord
Monitor Tire Positions	1 to 10 wheel positions
Sensor Alarm Trigger Settings	12.5% and 25% below the original tire inflation level; Upper alert variable by user from 10% to 45% (or off) High temperature alert at 194° F
RS232 Capable	Real time serial packet data Data logging




STANDARD SENSOR



Specifications

Sensor Transmit Range	Approx. 300 feet (Line-of-Sight)
Operating Frequency	433.92 MHz FM
Operating Temperature Range	-40°C / -40F to +150°C / 302F
Sensor Weight	2/3 oz. or 17 grams
Sensor Dimensions	1.01" H x 1.11" Dia.
Sensor Batteries	Internal, non-rechargeable
Sensor Pressure Range	8 to 299 PSI 55 to 1999 kPa 1 to 20.3 BAR
Sensor Low Voltage Shutdown	2.2 Volts
Accuracy	+/- 3% range up to 120 PSI +/- 5% from 120 PSI up
Installation	Screws onto regular valve stem

INDUSTRIAL

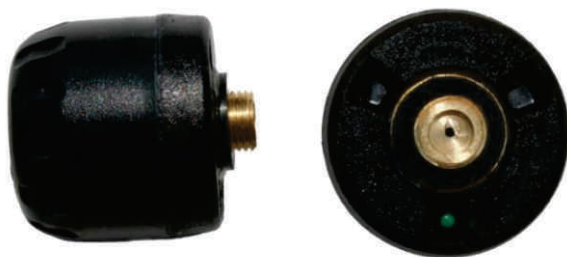

Specifications

Sensor Transmit Range	Approx. 300 feet (Line-of-Sight)
Operating Frequency	433.92 MHz FM
Operating Temperature Range	-40°C / -40F to +150°C / 302F
Sensor Weight	2/3 oz. or 17 grams
Sensor Dimensions	1.01" H x 1.11" Dia.
Sensor Batteries	Internal, non-rechargeable
Sensor Pressure Range	8 to 299 PSI 55 to 1999 kPa 1 to 20.3 BAR
Sensor Low Voltage Shutdown	2.2 Volts
Accuracy	+/- 3% range up to 120 PSI +/- 5% from 120 PSI up
Installation	Screws to inside of large bore valve stem

STANDARD SENSOR



Specifications

Sensor Transmit Range	Approx. 300 feet (Line-of-Sight)
Operating Frequency	433.92 MHz FM
Operating Temperature Range	-40°C / -40F to +150°C / 302F
Sensor Weight	2/3 oz. or 17 grams
Sensor Dimensions	1.01" H x 1.11" Dia.
Sensor Batteries	Internal, non-rechargeable
Sensor Pressure Range	8 to 299 PSI 55 to 1999 kPa 1 to 20.3 BAR
Sensor Low Voltage Shutdown	2.2 Volts
Accuracy	+/- 3% range up to 120 PSI +/- 5% from 120 PSI up
Installation	Screws onto regular valve stem